




Rubber matting

Saturn Basic fine rib

Finish: one side fine ribbed, other side fabric finish
 Temperature range: -30° to +70°C

Features: strong and abrasion resistant • Equipped with non slip ribbing on the top

Application: very wide range of applications

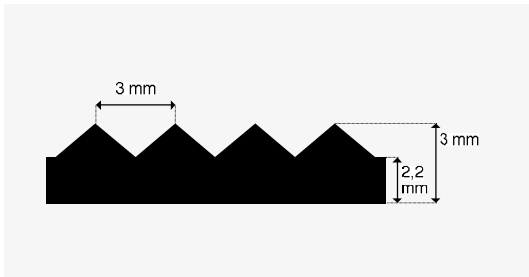

		Test method
Specific gravity grs/cm ³	1,50	DIN 53508
Hardness shore A ± 5°	70	DIN 53505
Tensile strength Mpa	3	DIN 53504
Elongation at break %	200	DIN 53504
Compression set at 70°C for 22 hours %	20	DIN 53517

Thickness (mm)	No. of insertions	Width (mtr)	Length (mtr)	Colour	Quality	Article no.
2,7	0	1,00	10	black	SBR	MR65SX 2,7/0-1
2,7	0	1,20	10	black	SBR	MR65SX 2,7/0-1,2
2,7	0	0,205	10	black	SBR	MR65SX 2,7/0-0,2
2,7	0	0,305	10	black	SBR	MR65SX 2,7/0-0,3
2,7	0	0,405	10	black	SBR	MR65SX 2,7/0-0,4
2,7	0	0,505	10	black	SBR	MR65SX 2,7/0-0,5
2,7	0	0,605	10	black	SBR	MR65SX 2,7/0-0,6