

# NOBELAIR® AS/R



## Reinforced hose for Breathing air.

In accordance with EN 14593 and EN 14594 standards. Antistatic, heat resistant and 5 layer construction with polyester reinforcement.

### APPLICATIONS

Specially designed for compressed air supply to individual protective apparatus which are in accordance with the EN 14593 and EN 14594 standards

### SECTORS OF ACTIVITY

Nuclear power plants, petrochemical industry, paint application in building and manufacturing

**RESISTIVITY <math><10^6 /M</math>  
COMPLIES WITH NF EN ISO 8031**

**Marking** NOBELAIR AS/R for EN14593 & EN14594 Ø inn x Ø out Breathing air hose / Antistatic / Heat resistant / Decontamination proof [Year of fabrication] [Batch number]

### ADVANTAGES

NOBELAIR® AS/R hose is a top of the range hose, linking comfort of use to resistance in the most arduous conditions. Its extremely flexible, lightweight and user friendly.

Its considerable thickness ensures a retained profile. The well balanced reinforcement provides it with excellent dimensional stability.

The antistatic inner layer of NOBELAIR® AS/R breathing air hose is a guarantee of safety if use in hazardous environments (paint booths, presence of hydrocarbons...). This capability is permanent, obtained by the addition of carbon directly into the hose material.

### CONNECTORS


#### WARNING

Metal connectors must be used to maintain electrical continuity: Quick connectors, barbed or serrated connectors. Swaged fittings can be used if they do not damage the hose.

**CONTINUOUS USE UP TO 70°C  
AT 6 BAR (80° AT PEAK)**

### CHEMICAL RESISTANCE

See table pages 102 to 105 column B for outlayer, col. A for innerlayer.

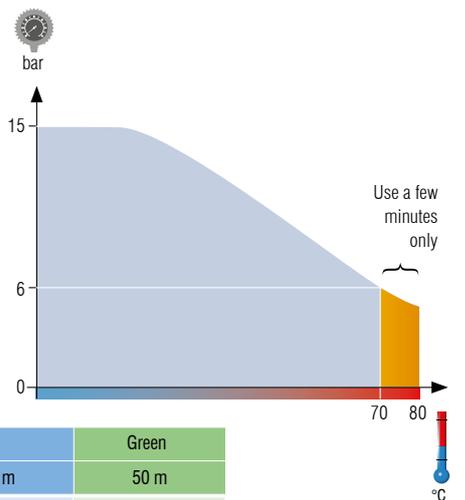

Ø mm	+/- mm	Ø mm	+/- mm	Ø mm	g/m	bar	bar	mm	Blue		Green
									25 m	50 m	50 m
6	+/-0.5	12	+/-0.5	3	103	60	15	40		092843	093651
8	+/-0.5	14	+/-0.5	3	126	60	15	50	092856	092869	
10	+/-0.5	16	+/-0.5	3	148	60	15	65	092872	092885	093653
12.7	+/-0.6	19	+/-0.6	3.15	192	60	15	80		092901	
19	+/-0.8	28	+/-0.8	4.5	405	60	15	120		092927	