



# ART. 8378.104

## Open hose reels with polyurethane hose

Fixed hose reel, s.390, for air-water, 20 bar, hose PU 10 m  $\varnothing$  13 x 19 mm



### FLUIDS

AIR | WATER | NITROGEN/INFLATING USE

### SECTORS

AERONAUTIC | AGRICULTURE | AUTOMOTIVE | LUBE TRUCK AND INDUSTRIAL VEHICLE | BUILDING INDUSTRY AND ROAD CONSTRUCTION | MANUFACTURING INDUSTRY

### CERTIFICATIONS

ATEX (ZONE 2) | ATEX (ZONE 22)

Features	UM	Value
Pressure	bar	20
Compatible fluids		air - water
Swivel joint		brass
Seals		Viton®
Characteristic		fixed
Material		painted steel
Couplings		brass
Hose		976.110
$\varnothing$ and hose length	$\varnothing$ - m	1/2" - 10
Inlet		G 1/2" (m)
Outlet		G 1/2" (m)
Reel flow path		brass - nylon PA6
Internal drum width	mm	98

RAASM SpA

via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA  
Tel. 0039 0424 571111 - Fax. 0039 0424 571135


info@raasm.com - www.raasm.com

Copyright © 2020 All rights reserved to RAASM S.p.A.



Overall dimensions

---

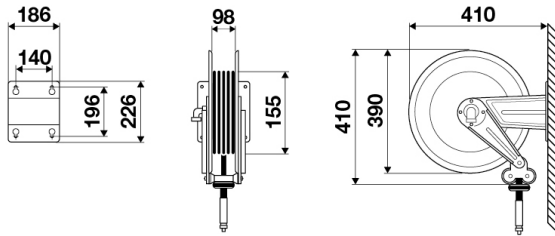

RAASM SpA

via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA  
Tel. 0039 0424 571111 - Fax. 0039 0424 571135

info@raasm.com - www.raasm.com

Copyright © 2020 All rights reserved to RAASM S.p.A.