



ART. 8430.4000

Double inlet-outlet hose reels

Fixed hose reel, s.430, for oil, 150 bar, without hose.
Arrangement for double inlet-outlet. Inlet G 1/2" (f),
outlet G 3/8"G (m)



FLUIDS

FRESH OIL | PAINT

SECTORS

CLEANING | MANUFACTURING INDUSTRY | SHIPPING AND OFFSHORE

CERTIFICATIONS

ATEX (ZONE 1) | ATEX (ZONE 21)

Features	UM	Value
Pressure	bar	150
Compatible fluids		oil - paints
Swivel joint		2 painted steel swivels joint
Seals		polyurethane
Characteristic		fixed
Material		painted steel
Couplings		-
Hose		-
Ø and hose length	Ø - m	-
Inlet		G 1/2" (f)
Outlet		G 3/8" (m)
Reel flow path		zinc plated steel
Internal drum width	mm	97

RAASM SpA


via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA
Tel. 0039 0424 571111 - Fax. 0039 0424 571135

info@raasm.com - www.raasm.com

Copyright © 2020 All rights reserved to RAASM S.p.A.



Overall dimensions

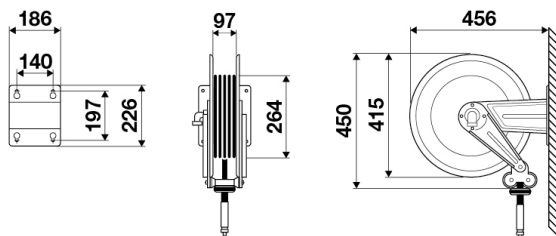

RAASM SpA

via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA
Tel. 0039 0424 571111 - Fax. 0039 0424 571135

info@raasm.com - www.raasm.com

Copyright © 2020 All rights reserved to RAASM S.p.A.