



ART. 8550.411

Hose reels - s. 540-560

Swivelling hose reel, s.540, for oil and similar, 100 bar,
with black rubber hose 15 m, $\varnothing$ 3/4"



FLUIDS

FRESH OIL | ANTIFREEZE

SECTORS

AERONAUTIC | AGRICULTURE | AUTOMOTIVE | LUBE TRUCK AND INDUSTRIAL VEHICLE | BUILDING INDUSTRY AND
ROAD CONSTRUCTION | RAILWAY TRANSPORT | MANUFACTURING INDUSTRY | MINING

CERTIFICATIONS

ATEX (ZONE 1) | ATEX (ZONE 21)

Features	UM	Value
Pressure	bar	100
Compatible fluids		oils and similar products
Swivel joint		zinc plated steel
Seals		polyurethane
Characteristic		swivelling
Material		painted steel
Couplings		zinc plated steel
Hose		998.3315
$\varnothing$ and hose length	$\varnothing$ - m	1" - 15
Inlet		G 1" (f)
Outlet		G 3/4" (m)
Reel flow path		zinc plated steel
Internal drum width	mm	165

RAASM SpA


via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA
Tel. 0039 0424 571111 - Fax. 0039 0424 571135

info@raasm.com - www.raasm.com

Copyright © 2020 All rights reserved to RAASM S.p.A.



Overall dimensions

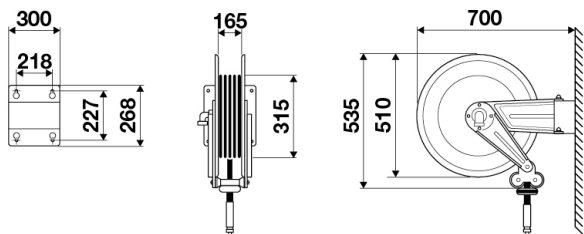

RAASM SpA

via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA
Tel. 0039 0424 571111 - Fax. 0039 0424 571135

info@raasm.com - www.raasm.com

Copyright © 2020 All rights reserved to RAASM S.p.A.