



AIR-WATER - 20 bar

AISI 304 STAINLESS STEEL




ATEX directive
II 3 GD c X

FIXED



Article

SWIVELLING



Article

Supplied with:

- hoses in black synthetic rubber
- zinc plated steel couplings
- brass swivel joint
- "Viton®" seals



S. 290

8292.100
8292.101
8292.104

-

Hose supplied

Connection

inlet

outlet

without hose

F3/8"G

F3/8"G

10m - 3/8" (995.210)

F3/8"G

M3/8"G

15m - 1/4" (993.215)

F3/8"G

M1/4"G

S. 330

8332.100
8332.101

-

without hose

F3/8"G

F3/8"G

12m - 3/8" (995.211)

F3/8"G

M3/8"G

S. 390

8392.100
8392.102

8382.100
8382.102

without hose

F3/8"G

F3/8"G

18m - 3/8" (995.217)

F3/8"G

M3/8"G

S. 430

8432.100
8432.101
8432.102
8432.103
8432.104

8422.100
8422.101
8422.102
8422.103
8422.104

without hose

F1/2"G

F1/2"G

12m - 3/8" (995.212)

F1/2"G

M3/8"G

18m - 3/8" (995.218)

F1/2"G

M3/8"G

10m - 1/2" (996.210)

F1/2"G

M1/2"G

15m - 1/2" (996.215)

F1/2"G

M1/2"G

for ABS hose reels Series 430 see page 153

S. 530

8532.100
8532.101
8532.102

8522.100
8522.101
8522.102

without hose

F1/2"G

F1/2"G

20m - 1/2" (996.220)

F1/2"G

M1/2"G

25m - 1/2" (996.225)

F1/2"G

M1/2"G

S. 540

8542.100
8542.101
8542.102
8542.103
8542.105
8542.106

8552.100
8552.101
8552.102
8552.103
8552.105
8552.106

without hose

F1"G

F1"G

15m - 3/4" (997.215)

F1"G

M3/4"G

20m - 3/4" (997.220)

F1"G

M3/4"G

15m - 1" (998.215)

F1"G

M1"G

without hose

F1/2"G

F1/2"G

30m - 1/2" (996.230)

F1/2"G

M1/2"G

S. 560

8562.100
8562.101
8562.103
8562.104
8562.105
8562.106

-

without hose

F1"G

F1"G

30m - 3/4" (997.230)

F1"G

M3/4"G

40m - 3/4" (997.240)

F1"G

M3/4"G

20m - 1" (998.220)

F1"G

M1"G

30m - 1" (998.230)

F1"G


M1"G

without hose

F1/2"G


F1/2"G

FIXED OVERALL DIMENSIONS

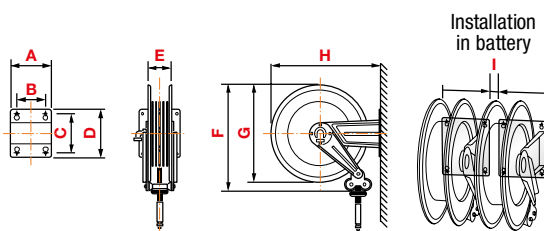

Art.	A	B	C	D	E	F	G	H	I	1-m ³	kg *
S. 290	186	140	196	226	110	310	300	320	-	0,037	from 7 to 12
S. 330	186	140	196	226	110	355	350	365	20	0,045	from 8 to 13
S. 390	186	140	196	226	110	400	390	410	20	0,068	from 11 to 18
S. 430	186	140	196	226	115	460	420	460	20	0,098	from 14 to 24
S. 530	203	153	220	258	115	550	510	560	20	0,120	from 19 to 42
S. 540	300	218	228	268	190	550	510	573	0	0,175	from 24 to 40
S. 560	488	399	238	272	368	550	510	578	0	0,310	from 30 to 80

SWIVELLING OVERALL DIMENSIONS

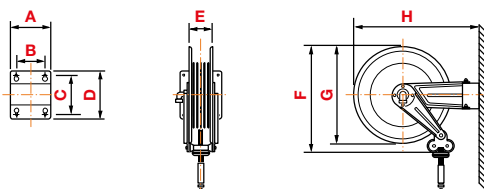

Art.	A	B	C	D	E	F	G	H	1-m ³	kg
S. 380	184	146	106	144	110	400	390	484	0,098	from 12 to 19
S. 420	208	162	118	164	115	460	420	541	0,098	from 15 to 25
S. 520	228	182	154	200	115	560	510	642	0,120	from 20 to 43
S. 550	300	218	226	268	190	560	510	702	0,175	from 25 to 41

* The list shows min and max weight for each series: min weight refers to version without hose, max weight refers to heaviest version which depends on hose length and diameter.