



WATER MAX 130 °C - 100-200-400 bar


AISI 304 STAINLESS STEEL

Supplied with:


- AISI 304 stainless steel couplings
- AISI 304 stainless steel swivel joint
- "Viton®" seals (100-200 bar)
- "Teflon®" seals (400 bar)



ATEX directive
IIB 2 GD c T4 T135 °C X



Connection	
inlet	outlet
F1/2"G	F1/2"G
F3/8"G	F1/2"G
F3/8"G	F1/2"G



S. 430

Water 130 °C **100** bar

Article 8434.200

Article 8424.200

Water 130 °C **200** bar

Article 8434.300

Article 8424.300

Water 130 °C **400** bar

Article 8434.350

Article 8424.350



S. 530

Water 130 °C **100** bar

Article 8534.200

Article 8524.200

Water 130 °C **200** bar

Article 8534.300

Article 8524.300

Water 130 °C **400** bar

Article 8534.350

Article 8524.350



S. 540

Water 130 °C **100** bar

Article 8544.200

Article 8554.200

Article 8544.205

Article 8554.205

Water 130 °C **200** bar

Article 8544.300

Article 8554.300

Water 130 °C **400** bar

Article 8544.350

Article 8554.350



S. 560

Water 130 °C **100** bar

Article 8564.200

Article 8564.206

-

-

Water 130 °C **200** bar

Article 8564.300

-

Water 130 °C **400** bar

Article 8564.350

-



FIXED HOSE REELS INSTALLATION

The quick coupling support is equipped with 4 slot holes that allow an easy and safe installation of the hose reels.

The **template** supplied facilitates drilling of the holes and therefore hose reels fixing.

SWIVELLING HOSE REELS INSTALLATION

The **quick coupling swivelling support** facilitates hose reels installation and enables **55° rotation** to the right or left or locking in **fixed positioned at 0°** by means of clamping with two screws.

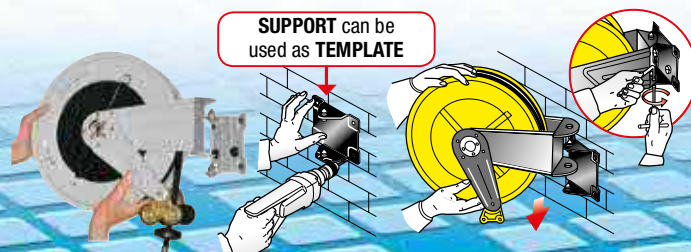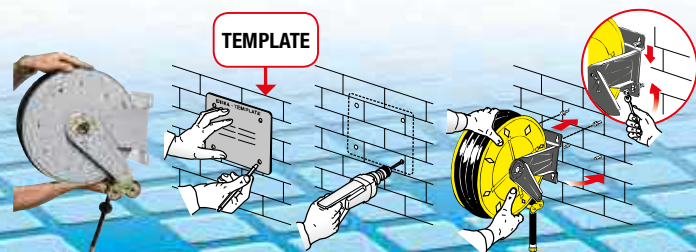



OIL AND SIMILAR PRODUCTS - 150 bar

AISI 304 STAINLESS STEEL




ATEX directive
IIB 2 GD c T4 T135 °C X

FIXED



Article

SWIVELLING



Article

Supplied with:

- zinc plated steel couplings
- AISI 304 stainless steel swivel joint
- "Viton®" seals

Hose supplied

Connection

inlet

outlet



S. 390

8392.200

8382.200

without hose

F1/2"G

F 3/8"-1/2"G

S. 430

8434.200

8424.200

without hose

F1/2"G

F1/2"G

for ABS hose reels Series 430 see page 153

S. 530

8534.200

8524.200

without hose

F1/2"G

F1/2"G

S. 540

8544.200


8554.200

without hose

F1"G


F1"G

FIXED OVERALL DIMENSIONS

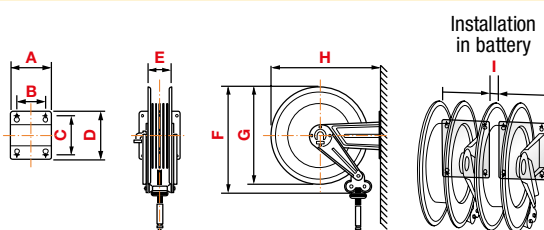

Art.	A	B	C	D	E	F	G	H	I	1-m ³	kg *
S. 330	186	140	196	226	110	355	350	365	20	0,045	from 8 to 13
S. 390	186	140	196	226	110	400	390	410	20	0,068	from 11 to 18
S. 430	186	140	196	226	115	460	420	460	20	0,098	from 14 to 24
S. 530	203	153	220	258	115	550	510	560	20	0,120	from 19 to 42
S. 540	300	218	228	268	190	550	510	573	0	0,175	from 24 to 40
S. 560	488	399	238	272	368	550	510	578	0	0,310	from 30 to 80

SWIVELLING OVERALL DIMENSIONS

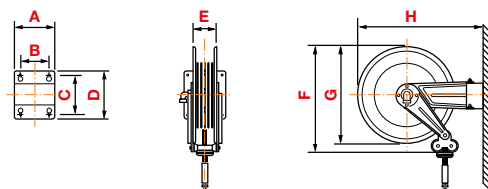

Art.	A	B	C	D	E	F	G	H	1-m ³	kg
S. 380	184	146	106	144	110	400	390	484	0,098	from 12 to 19
S. 420	208	162	118	164	115	460	420	541	0,098	from 15 to 25
S. 520	228	182	154	200	115	560	510	642	0,120	from 20 to 43
S. 550	300	218	226	268	190	560	510	702	0,175	from 25 to 41

* The list shows min and max weight for each series: min weight refers to version without hose, max weight refers to heaviest version which depends on hose length and diameter.



WATER MAX 130 °C* - 100 bar

AISI 304 STAINLESS STEEL



ATEX directive
IIB 2 GD c T4 T135 °C X

FIXED



Article

8332.400


S. 330

hygienic hose

8332.201

8333.202

SWIVELLING



Article

-

-

-

Supplied with:

- hoses in black synthetic rubber
- zinc plated steel couplings
- AISI 304 stainless steel swivel joint
- "Viton®" seals



Hose supplied	Connection	
	inlet	outlet
without hose	F1/2"G	F 3/8"-1/2"G
12m - 3/8" (995.313)	F1/2"G	M3/8"G
12m - 3/8" (995.412)	F1/2"G	M3/8"G

without hose	F1/2"G	F3/8"-1/2"G
17m - 3/8" (995.318)	F1/2"G	M3/8"G
12m - 3/8" (995.412)	F1/2"G	M3/8"G

without hose	F1/2"G	F1/2"G
10m - 1/2" (996.311)	F1/2"G	M1/2"G
15m - 1/2" (996.316)	F1/2"G	M1/2"G
15m - 1/2" (996.415)	F1/2"G	M1/2"G

for ABS hose reels Series 430 see page 153

without hose	F1/2"G	F1/2"G
20m - 1/2" (996.321)	F1/2"G	M1/2"G
25m - 1/2" (996.425)	F1/2"G	M1/2"G

without hose	F1"G	F1"G
20m - 3/4" (997.320)	F1"G	M3/4"G
15m - 1" (998.315)	F1"G	M1"G
20m - 3/4" (997.420)	F1"G	M3/4"G


without hose	F1"G	F1"G
30m - 1" (998.330)	F1"G	M1"G

* 50 bar

* 50 bar


* Effective temperature only for versions without hose. For the maximum temperature of the versions with hose, contact technical dept.

FIXED OVERALL DIMENSIONS

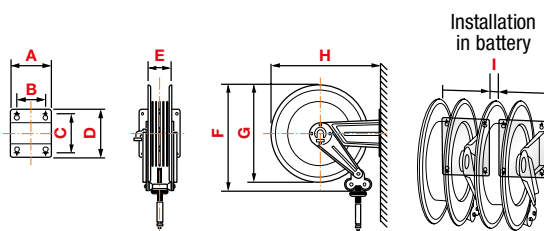

Art.	A	B	C	D	E	F	G	H	I	1-m³	kg *
S. 330	186	140	196	226	110	355	350	365	20	0,045	from 8 to 13
S. 390	186	140	196	226	110	400	390	410	20	0,068	from 11 to 18
S. 430	186	140	196	226	115	460	420	460	20	0,098	from 14 to 24
S. 530	203	153	220	258	115	550	510	560	20	0,120	from 19 to 42
S. 540	300	218	228	268	190	550	510	573	0	0,175	from 24 to 40
S. 560	488	399	238	272	368	550	510	578	0	0,310	from 30 to 80

SWIVELLING OVERALL DIMENSIONS

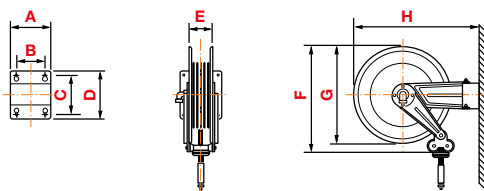

Art.	A	B	C	D	E	F	G	H	1-m³	kg
S. 380	184	146	106	144	110	400	390	484	0,098	from 12 to 19
S. 420	208	162	118	164	115	460	420	541	0,098	from 15 to 25
S. 520	228	182	154	200	115	560	510	642	0,120	from 20 to 43
S. 550	300	218	226	268	190	560	510	702	0,175	from 25 to 41

* The list shows min and max weight for each series: min weight refers to version without hose, max weight refers to heaviest version which depends on hose length and diameter.