



CABLE REELS SERIES 350

earthing, open with painted steel drum



In accordance with directive



Colour:



Usage environment
temperature: $-5 \div +40$ °C

Fixing bracket: Fixed

Cable inlet: 1,2 m

EARTHING PLIERS



ANTI-DEFLAGRATION

P/N 735112

P/N 735111 (available on request)

STANDARD Articles

| STANDARD Articles | | | | | | |
|-------------------|---------------|---|----------------------------|------------------|-----------------|--------|
| P/N standard | Type of cable | Cable conductor material | Cable conductor insulation | Cable length (m) | Earthing clamp | |
| | | | | | P/N | Ampere |
| 735000 | without cable | cable capacity max. 30 m - section 16 mm² | | | - | - |
| 735131.60141 | 1 x 6 | copper (green-yellow cable) | PUR | 14,5 m | explosion-proof | 10 |
| 735131.60261 | 1 x 6 | copper (green-yellow cable) | PUR | 26 m | explosion-proof | 10 |
| 735131.60152 | 1 x 6 | copper (green-yellow cable) | PUR | 15 m | 735112 | 50 |
| 735131.60252 | 1 x 6 | copper (green-yellow cable) | PUR | 25 m | 735112 | 50 |
| 735141.60152 | 1 x 7 | steel (orange cable) | PVC | 15 m | 735112 | 50 |
| 735141.60252 | 1 x 7 | steel (orange cable) | PVC | 25 m | 735112 | 50 |

Technical Characteristics

CABLE GUIDE

Large omnidirectional cable guide with 4 rollers, horizontal and vertical, to reduce cable wear and facilitate sliding.

MULTI POSITION ARMS

Cable outlet position can be changed manually by modifying the installation of the arms.

CABLE REELS DRUM

Sturdy and practical with ribs and rounded edges.

CABLE CLAMP PAD

Adjustable.

EARTHING CLAMP

3 types of clamps available: 50 A, 100 A and 10 A, explosion-proof.

STOP RACK

Makes it possible to lock the cable around every 0,5 m.

SPRING

Tested to withstand over 20000 work cycles.

PAWL


Easy to remove for maintenance or when the work requires free sliding.

FIXING BRACKET

Fixed, has 4 holes for safe, easy installation.

EARTHING CONNECTION

Overall dimensions **STANDARD** (mm)

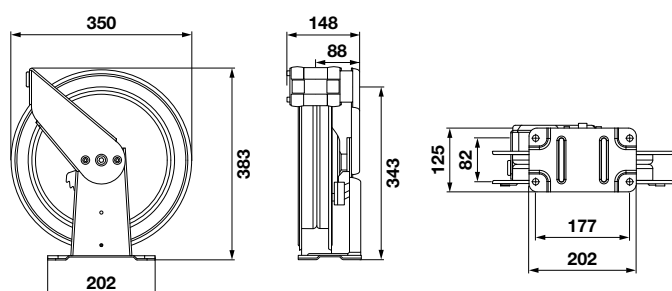

| Weight (Kg) | No. packages per pallet | Packaging (mm) |
|-------------|-------------------------|-----------------|
| 12,3 ÷ 14,1 | 36 | 390 x 188 x 403 |

